


# DE LIGHTING INC.

## LED High Bay Light

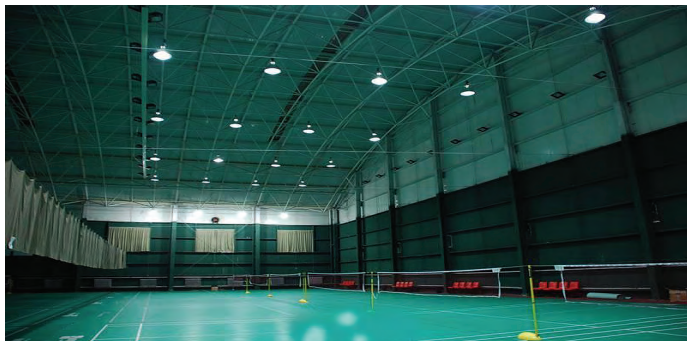

Model	DE-BYB-0-100-XX			DE-BYB-0-120-XX		
Input Voltage	AC100-277V			AC100-277V		
Power (W) ±5%	100W Driver A			120W Driver A		
Beam Angle (degrees)	45°	90°	120°	45°	90°	120°
Luminous Efficiency (lm/w)	80lm/w	87lm/w	90lm/w	79lm/w	86lm/w	90lm/w
Luminous Flux (lm)	8000lm	8700lm	9000lm	9480lm	10320lm	10800lm
Frequency	50/60Hz			50/60Hz		
CCT/Specified	2700K-6500K			2700K-6500K		
CRI	>70 or >80			>70 or >80		
Power Factor	>0.95			>0.95		
LED Chips	San'an/Epistar/Nichia/Cree or specified			San'an/Epistar/Nichia/Cree or specified		
Unit Size(No reflector)	320mmX φ 180mm			335mmX φ 180mm		
Unit Weight(No reflector)	4.7kg			5.0kg		
Size (With reflector)	φ 370mmX557mm(45° )		φ 425mmX461mm(90° )	φ 381X420mm(120° )		
Unit Weight(With reflector)	5.2kg			5.5kg		
Package Size(No reflector)	500*500*410mm/4pcs			500*500*425mm/4pcs		
Gross Weight(No reflector)	21.0kgs			21.8kgs		
Protection Level	IP65			IP65		
Working temperature	-40℃-- +50℃			-40℃-- +50℃		
Function	Dimmable			Dimmable		
Certificates	ULcUL/FCC			ULcUL/FCC		
Lifespan	30,000 hours			30,000 hours		
Warranty	5 years			5 years		